

IP110H IP100FS

Wi-Fi TRANSCEIVER









Real-time Voice Communication Tool that


Tunnel Construction and Mining IP110H **Access Point** IP110H

The communication area can be flexibly expanded as the work progresses. In addition, the safety of the user can be confirmed by the Man down and Motion sensor functions.

Factories and Warehouses Access Point IP110H + HM-186PI IP110H IP110H

The Wi-Fi radio can cover all working sites, offices and remote bases through an IP network (VPN). Wherever you are in the network, you can share the information you need.

Wi-Fi Radio Features

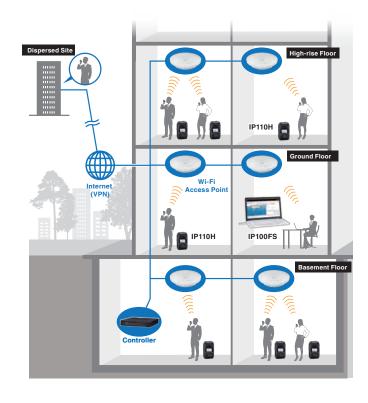

Scalable System Using Wi-Fi Network

By deploying Wi-Fi access points over an IP network, the communication range can be seamlessly extended.

License-Free Communication

The Wi-Fi radio uses common wireless LAN network frequencies, which do not need communication fees for running the system.

Communication with Dispersed Sites

When connected over an Internet VPN, Wi-Fi radios can communicate between dispersed sites.

Simultaneous TalkListen™ **Function**



The Wi-Fi radio provides full duplex communication like a telephone conversation and one-to-many communication.
The Simultaneous TalkListen™ function works with or without external


Call Recording Function

The Wi-Fi radio controller, IP1100CV and VE-PG4 can record specified communication audio to an external USB flash drive.

Instantly Connects You with Your Team



By deploying access points along the IP network, the Wi-Fi radio can communicate all the way from the basement to the top floor. Real-time simultaneous Talk and Listen is possible.

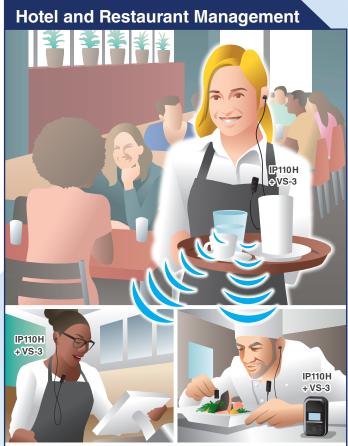

You can use the Wi-Fi radio as a handy communication

tool between staff members. With the optional Bluetooth®

headset, VS-3, the Wi-Fi radio can be used wirelessly

and inconspicuously.

Product Lineup

Compact, Lightweight Wi-Fi Radio with Simultaneous TalkListen™ Function



- All, Group, Talkgroup, Individual and Telephone Calls
- 1000 mW loud audio from internal speaker
- Optional Bluetooth® headset, VS-3
- IP67 / IP54 waterproof and dust-tight
- Battery can be charged through the USB Type-CTM cable
- More than 20 hours of operating time (Tx 1: Rx 1: Stand-by 8 duty ratio)
- WPA2, WPA-Enterprise security
- <Other features>
- Audio is recorded for instant review
- Vibration alert function
- Motion/Stationary detection, man down and lone worker functions
- Over-the-Air programming
- Compatible with the IP100H Wi-Fi radio

Wi-Fi Transceiver
IP110H



Remote Communicator IP100FS (Supplied with a USB flash drive)



- Windows PC based communication app
- Obtains location info of each radio based on the access point being used
- Management functions such as remote lock function

IP110H SPECIFICATIONS

Wireless Standards	IEEE802.11 a/b/g/n/ac	Dimensions	57×96.9×25.1 mm, 2.2×3.8×1.0 in
Frequency Range*1	EXP: 2412-2462 MHz, 5180-5320, 5500-5700 MHz USA: 2412-2462 MHz, 5180-5320, 5500-5580, 5660-5700, 5745-5825 MHz	Difficusions	(W×H×D: Projections are not included)
		Weight (approximate)	146 g, 5.2 oz
Security	WEP (64/128-bit), WPA2-Enterprise, WPA-Enterprise, WPA-PSK, WPA2-PSK	Operating Time	More than 20 hours (TX 1 : RX 1 : Stand-by 8 duty ratio)
		Charging Time	4 hours (With BC-257 and BC-228)
AF Output Power	1000 mW typ. (Internal SP) / 300 mW typ. (External SP)	IP Rating	IP67 / IP54
Operating Temperature	-10 °C to +60 °C, +14 °F to +140 °F	MIL-STD-810	Passed 12 categories of environmental tests
Charging Temperature	0 °C to + 60 °C, + 32 °F to +140 °F	Supplied Accessories	OPC-2480 USB charger cable, MBB-1 belt clip

^{*}All stated specifications are subject to change without notice or obligation. *1 Authorized frequency range and channels may differ depending on the country.

OPTIONAL ACCESSORIES FOR IP110H

























MBB-1 Belt clip. Same as supplied.

IP100FS SYSTEM REQUIREMENTS

Operating System	Windows 11, Windows 10 (32-bit/64-bit)		
CPU	Intel® Core™ 2 Duo Processor E6600/ 2.4 GHz or faster		
System Memory	2 GB or more		
Hard Disk Space	1 GB of disk space (for saving log files)		
Display Resolution	Full HD (1920×1080 pixel) recommended / XGA (1024×768 pixel) at least		
LAN	100BASE-TX or faster Ethernet interface		
USB	USB1.1 / 2.0		
Other	Speaker, microphone or headset		

OPTIONAL ACCESSORIES FOR IP100FS



Wi-Fi RADIO CONTROLLER

IP1100CV

Wi-Fi Radio Controller

- Capable of controlling up to 300 Wi-Fi radios (including IP100FS)
- 19-Inch rack mount design with optional MBF-6, Rack Mount Bracket



VE-PG4

RoIP Gateway (Wi-Fi Radio controller built-in)

- Capable of controlling up to 50 Wi-Fi radios (including IP100FS)
- Interconnects with IP Phone and other digital and/or analog radio systems
- VPN function
- 19-Inch rack mount design with optional MBF-6, Rack Mount Bracket

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. SIMULTANEOUS TALKLISTEN is a trademark of Icom Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. Windows is a trademark the Microsoft group of companies. Intel, the Intel logo, and Intel Core are trademarks of Intel Corporation or its subsidiaries. USB Type-C and USB-C are trademarks of USB Implementers Forum. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc. www.icomamerica.com

Icom Canada www.icomcanada.com

Icom Brazil

E-mail: sales@icombrazil.com

Icom (Europe) GmbH www.icomeurope.com

Icom Spain S.L. www.icomspain.com

Icom (UK) Ltd. www.icomuk.co.uk

Icom France s.a.s. www.icom-france.com

Icom (Australia) Pty. Ltd. www.icom.net.au

Icom Asia Co., Ltd. www.icomasia.com

Your local distributor/dealer:

